






Outdoor Digital Signage – Floor Standing
Outdoor Touch Kiosk – Floor Standing

ODSxyS1, ODSxyS2; xy: 55, 65, 75, 86
OTKxyS1, OTKxyS2; xy: 55, 65, 75

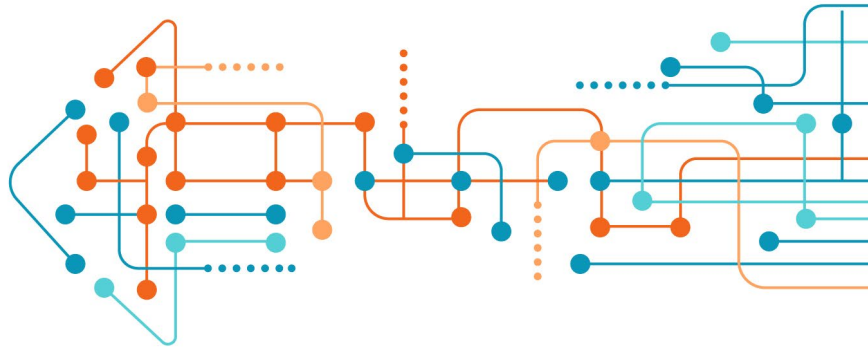



- High brightness LCD screen : 3000 cd/m2
- LG glass panel industrial grade
- Smart Brightness Control (Auto dimming)
- 6 mm Laminated technical tempered glass , UV prevention > 80%
- Operating system: Android 11.0,
- Media Player: 2GB RAM, 32GB SSD – Upgrade Available
- Interface: WiFi, USB 3.0 x 1; USB OTG x 1; Audio output x 1; LAN x 1; TF card slot (512GB max)
- Aluminum profile casing: Anti-corrosive + IP56
- Cooling system: Air circulation system, including screen front air curtain;
- Temp. control: Adjust heater and speed of fans based on ambient temperature
- Power supply : Meanwell 300W
- Leak switch and lightning protection
- Timer switch: To set working hours (auto power on/off)



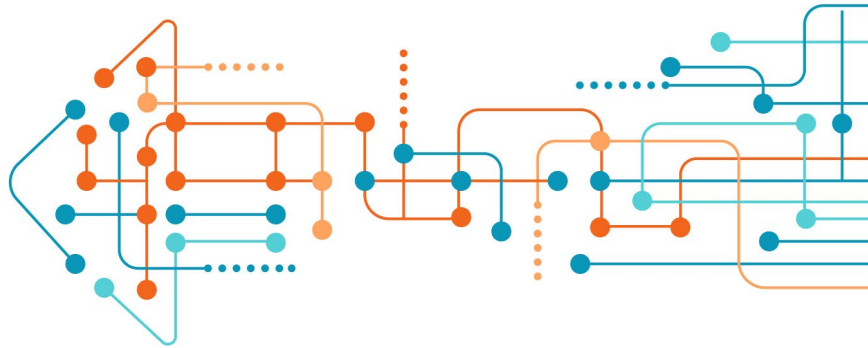


ODSxySz OTKxySz	Overall size (mm)	Visible size (mm)	Frame Specification	Resolution	Average power consumption	Operating temperature
55" One-sided ODS55S1 OTK55S1	1005(W) x 2250(H) x 190(T)	805(W) x 1430(H)	190 mm thickness aluminum	1920x1080, 2K	280W	-30 to 60 °C
55" Double-sided ODS55S2 OTK55S2	880(W) x 2090(H) x 278(T)	680(W) x 1210(H)	278 mm thickness aluminum	1920x1080, 2K	600W	-30 to 60 °C
65" Single-sided ODS65S1 OTK65S1	1005(W) x 2250(H) x 190(T)	805(W) x 1430(H)	190 mm thickness aluminum	3840x2160, 4K	560W	-30 to 60 °C
65" Double-sided ODS65S2 OTK65S2	1005(W) x 1930(H) x 278(T)	805(W) x 1430(H)	270 mm thickness aluminum	3840x2160, 4K	1000W	-30 to 60 °C
75" Single-sided ODS75S1 OTK75S1	1130(W) x 2470(H) x 190(T)	930(W) x 1650(H)	190 mm thickness aluminum	3840x2160, 4K	700W	-30 to 60 °C
75" Double-sided ODS75S2 OTK75S2	1130(W) x 2530(H) x 278(T)	930(W) x 1650(H)	270 mm thickness aluminum	3840x2160, 4K	1200W	-30 to 60 °C
86" Single-sided ODS86S1	1265(W) x 2715(H) x 190(T)	1065(W) x 1895(H)	190 mm thickness aluminum	3840x2160, 4K	1000W	-30 to 55 °C
86" Double-sided ODS86S2	1265(W) x 2675(H) x 278(T)	1065(W) x 1895(H)	270 mm thickness aluminum	3840x2160, 4K	1780W	-30 to 55 °C




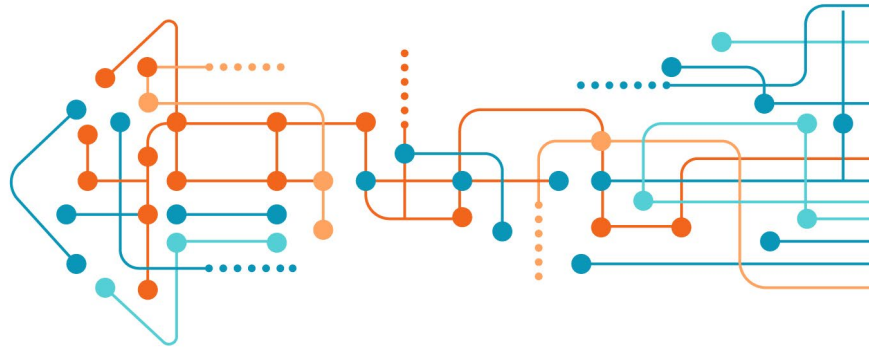


ODS55S1, OTK55S1 - 55" One-sided

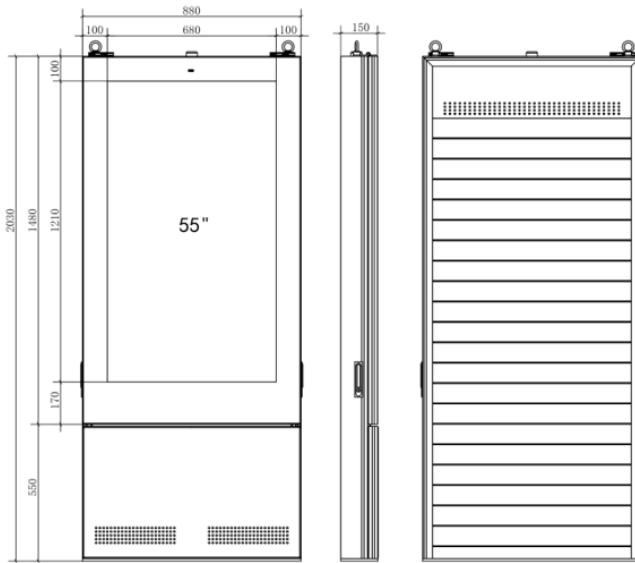



ODS55S2, OTK55S2 - 55" Two-sided

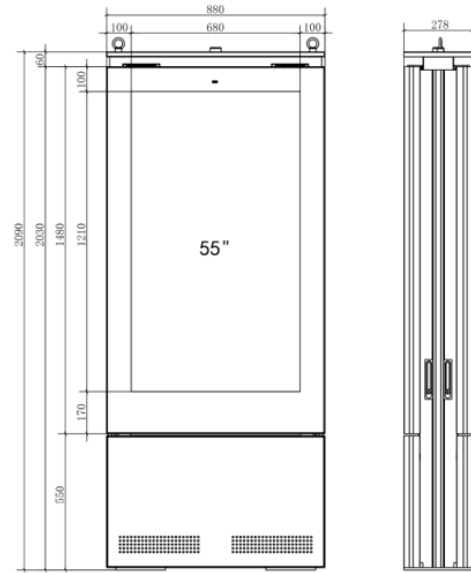


ODS65S1, OTK65S1 - 65" Single-sided

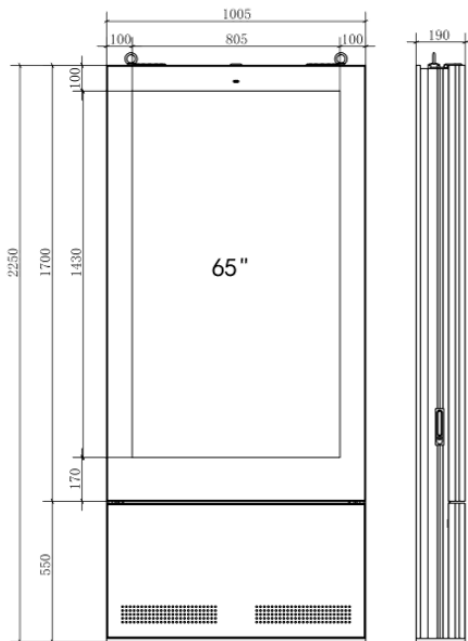


ODS65S2, OTK65S2 - 65" Double-sided

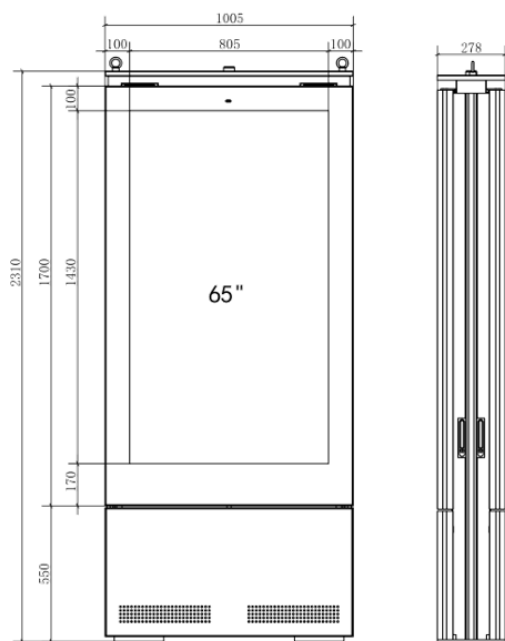


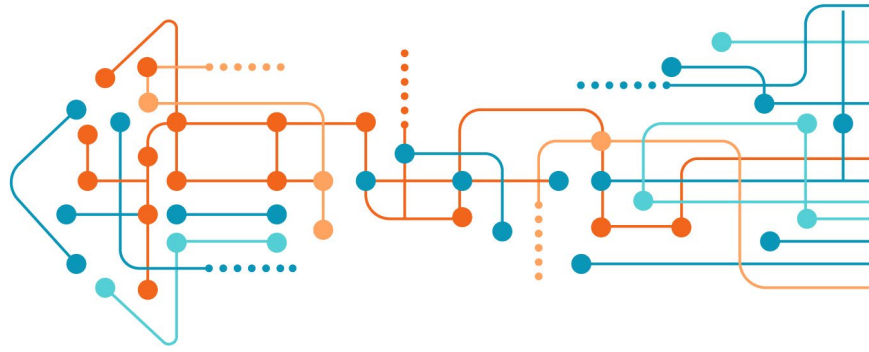


ODS75S1, OTK75S1 - 75" Single-sided

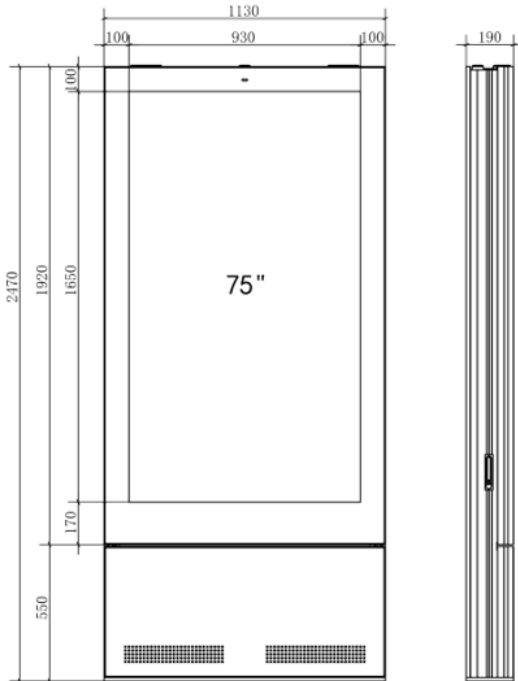

ODS75S2, OTK75S2 - 75" Double-sided

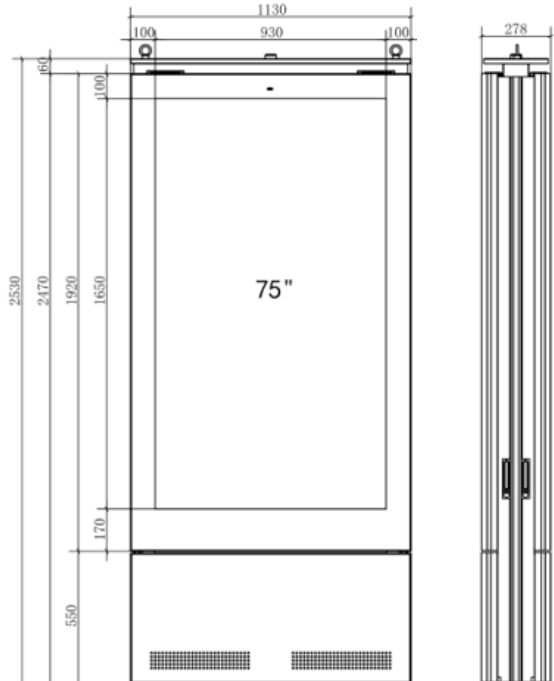

ODS86S1 - 86" Single-sided

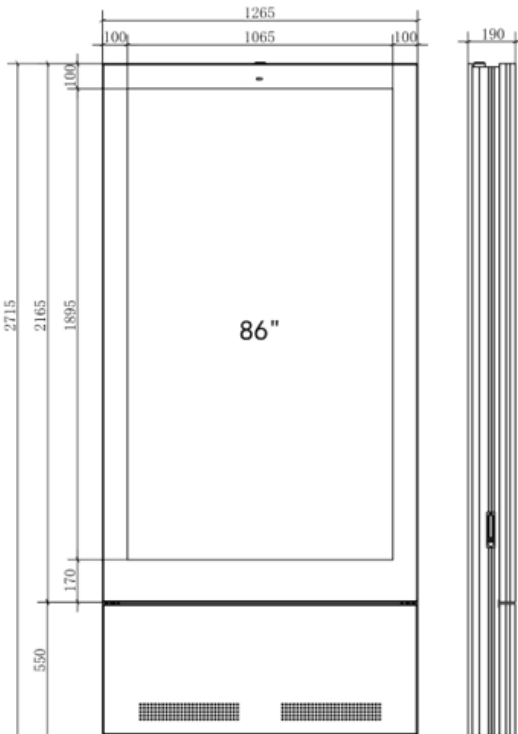

ODS86S2 - 86" Double-sided

