






Indoor Digital Signage – Floor Standing
Indoor Touch Kiosk – Floor Standing

IDSxyS1, IDSxyS2; xy: 55, 65, 75
ITKxyS1, ITKxyS2; xy: 55, 65, 75

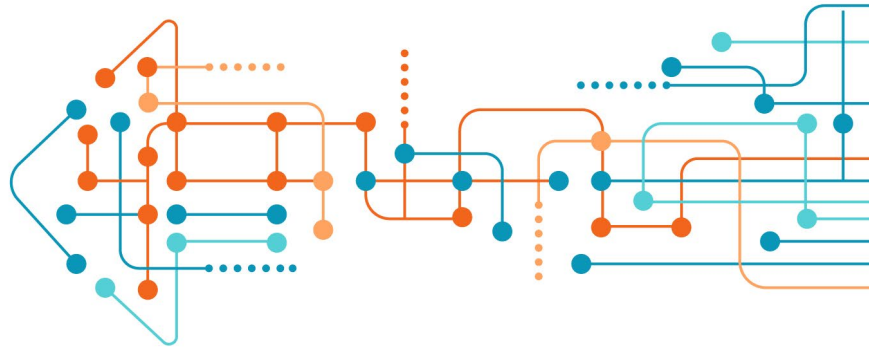



- Powder coating : black or gray
- LCD display ; Brightness: 700 cd/m2
- Contrast: 3000:1
- 6mm tempered glass
- Operating sytem: Android 11.0
- Media player: 2GB RAM, 32GB SSD - Upgrades Available
- WiFi
- Remote control
- LED illuminated tube on the side – optional
- Bottom plate - optional
- Cooling fans to discharge the heat air
- Automatic temprature control with fan speed
- Timer switch: to set working schedule auto power on/off
- Built-in speakers: 10W x 2pcs
- Operating temperature: 0-50 °C
- Humidity: 10% to 80%
- Warranty: 1 year



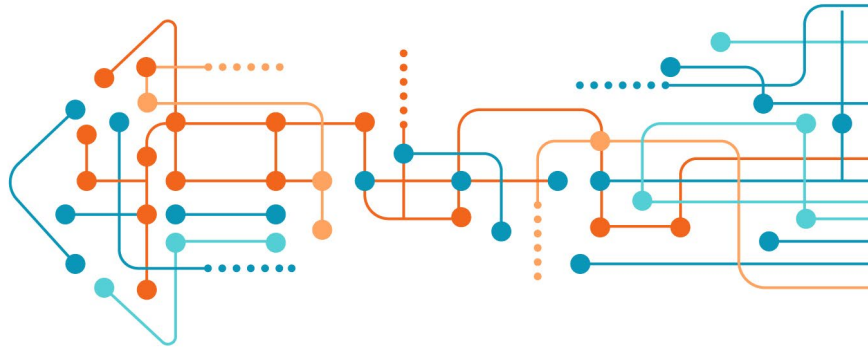


IDSxySz ITKxySz	Overall size (mm)	Visible size (mm)	Height of base (mm)	Resolution
55" One-sided ID55S1 (non-touch) ITK55S1 (touch)	840(W) x 1800(H) x 140(T)	680(W) x 1210(H)	430 mm	3840x2160, 4K
55" Double-sided ID55S2 (non-touch) ITK55S2 (touch)	840(W) x 1800(H) x 232(T)	680(W) x 1210(H)	430 mm	3840x2160, 4K
65" Single-sided ID65S1 (non-touch) ITK65S1 (touch)	965(W) x 2000(H) x 150(T)	805(W) x 1430(H)	410 mm	3840x2160, 4K
65" Double-sided ID65S2 (non-touch) ITK65S2 (touch)	965(W) x 1960(H) x 232(T)	805(W) x 1430(H)	370 mm	3840x2160, 4K
75" Single-sided ID75S1 (non-touch) ITK75S1 (touch)	1130(W) x 2300(H) x 140(T)	930(W) x 1650(H)	450 mm	3840x2160, 4K
75" Double-sided ID75S2 (non-touch) ITK75S2 (touch)	1130(W) x 2300(H) x 232(T)	930(W) x 1650(H)	450 mm	3840x2160, 4K




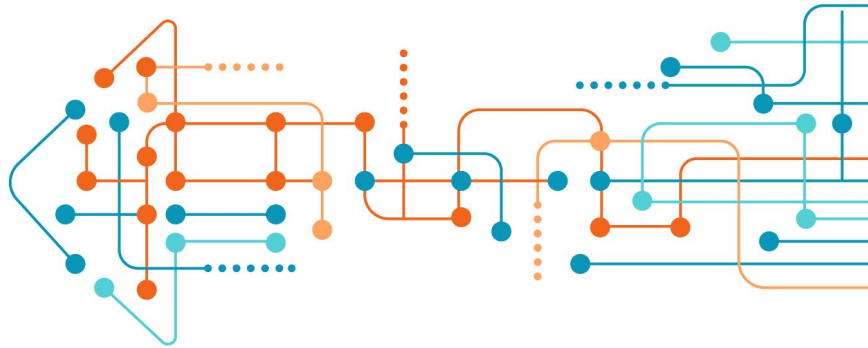


IDS55S1, ITK55S1 - 55" One-sided

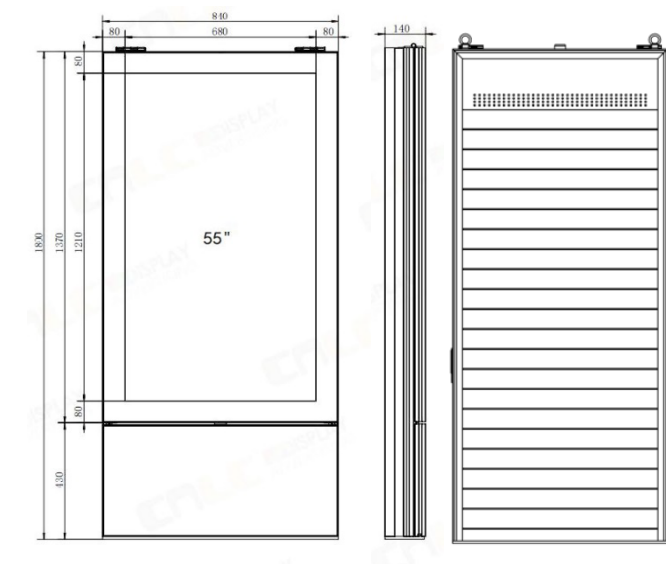


IDS55S2, ITK55S2 - 55" Double-sided

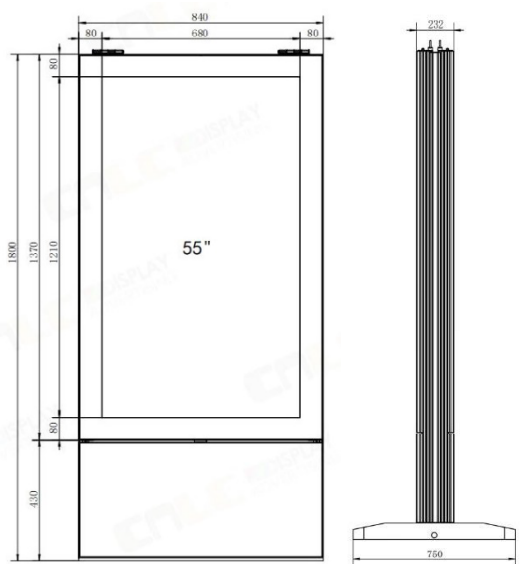


IDS65S1, ITK65S1 - 65" Single-sided

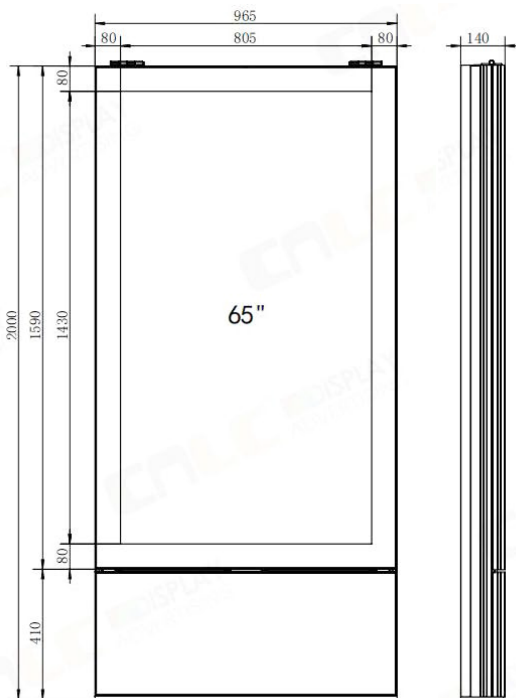


IDS65S2, ITK65S2 - 65" Double-sided

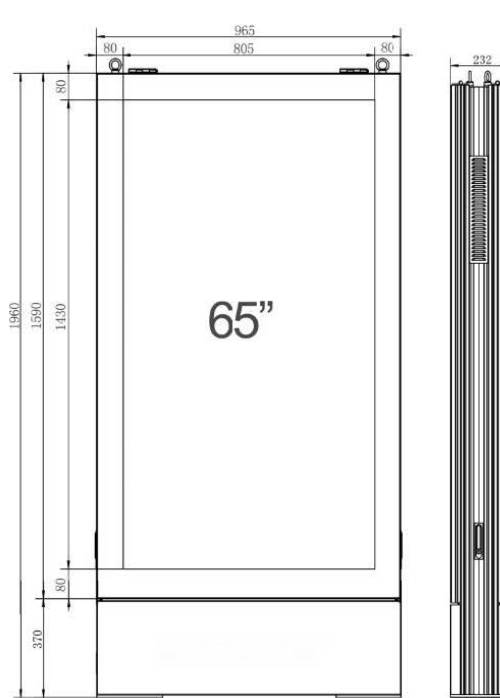

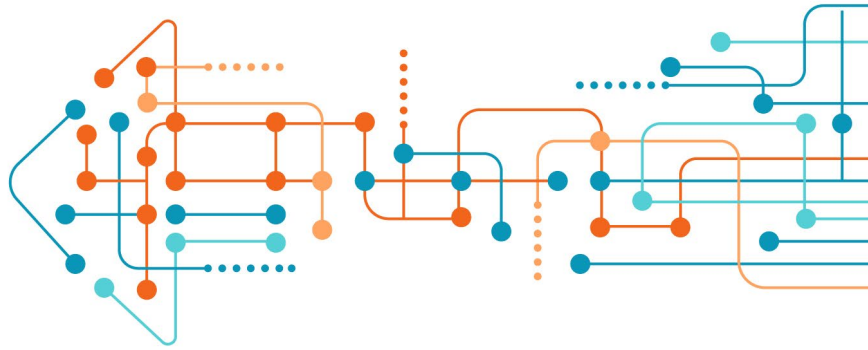

IDS75S1, ITK75S1 - 75" Single-sided

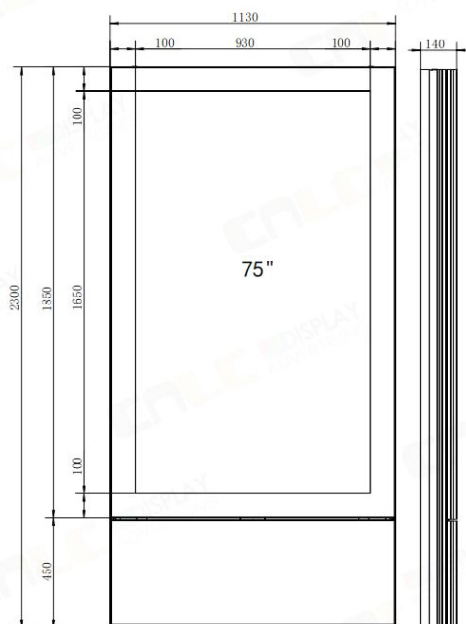

IDS75S2, ITK75S2 - 75" Double-sided

